


LP Gas Alarm Specifications	
Product name	LP gas alarm
Type	KTS-P100、KTS-P100(S)
Detailed type	KTS-P100M、KTS-P100M(S)
Target use	For LP gas (Not intended to prevent poisoning due to incomplete combustion or lack of oxygen)
Alarm spec	Lower Explosive Limit Concentration (LEL) の1/100以上1/4以下
Detection method	Contact combustion type
Alarm system	Immediate alarm, automatic restart
Indicator lamp	Red lamp: Immediate flashing
Warning sound	Electronic buzzer intermittent sound: Immediate
Response Time	Within 30 seconds
Alarm volume	More than 70dB/m
External output	(None)
Power indicator	Red light
Power	AC100V±10%, 50/60Hz common
Power consumption	Approx. 1.0 W (during monitoring and alarm)
Operating temp.	-10 to +40° C (no condensation)
Initial Tweet Prevention	Approx. 40 seconds (red light on)
Power cord	KTS-P100 : Approx. 2.5 m (plug with spare outlet) KTS-P100(S) : About 35 cm
Dimensions and weight	80(H) × 62(W) × 32(D)mm (excluding projections), approx. 200g
Installation	Wall-mounted with mounting brackets Mounting position: Either vertical or horizontal
Accessories	User's Manual and Warranty 1 Inspection gas 1 Seal when it rings 1
Optional goods	Installation tools 1 cord stopper 3 Wood screw (long) 3 Wood screw (short) 2

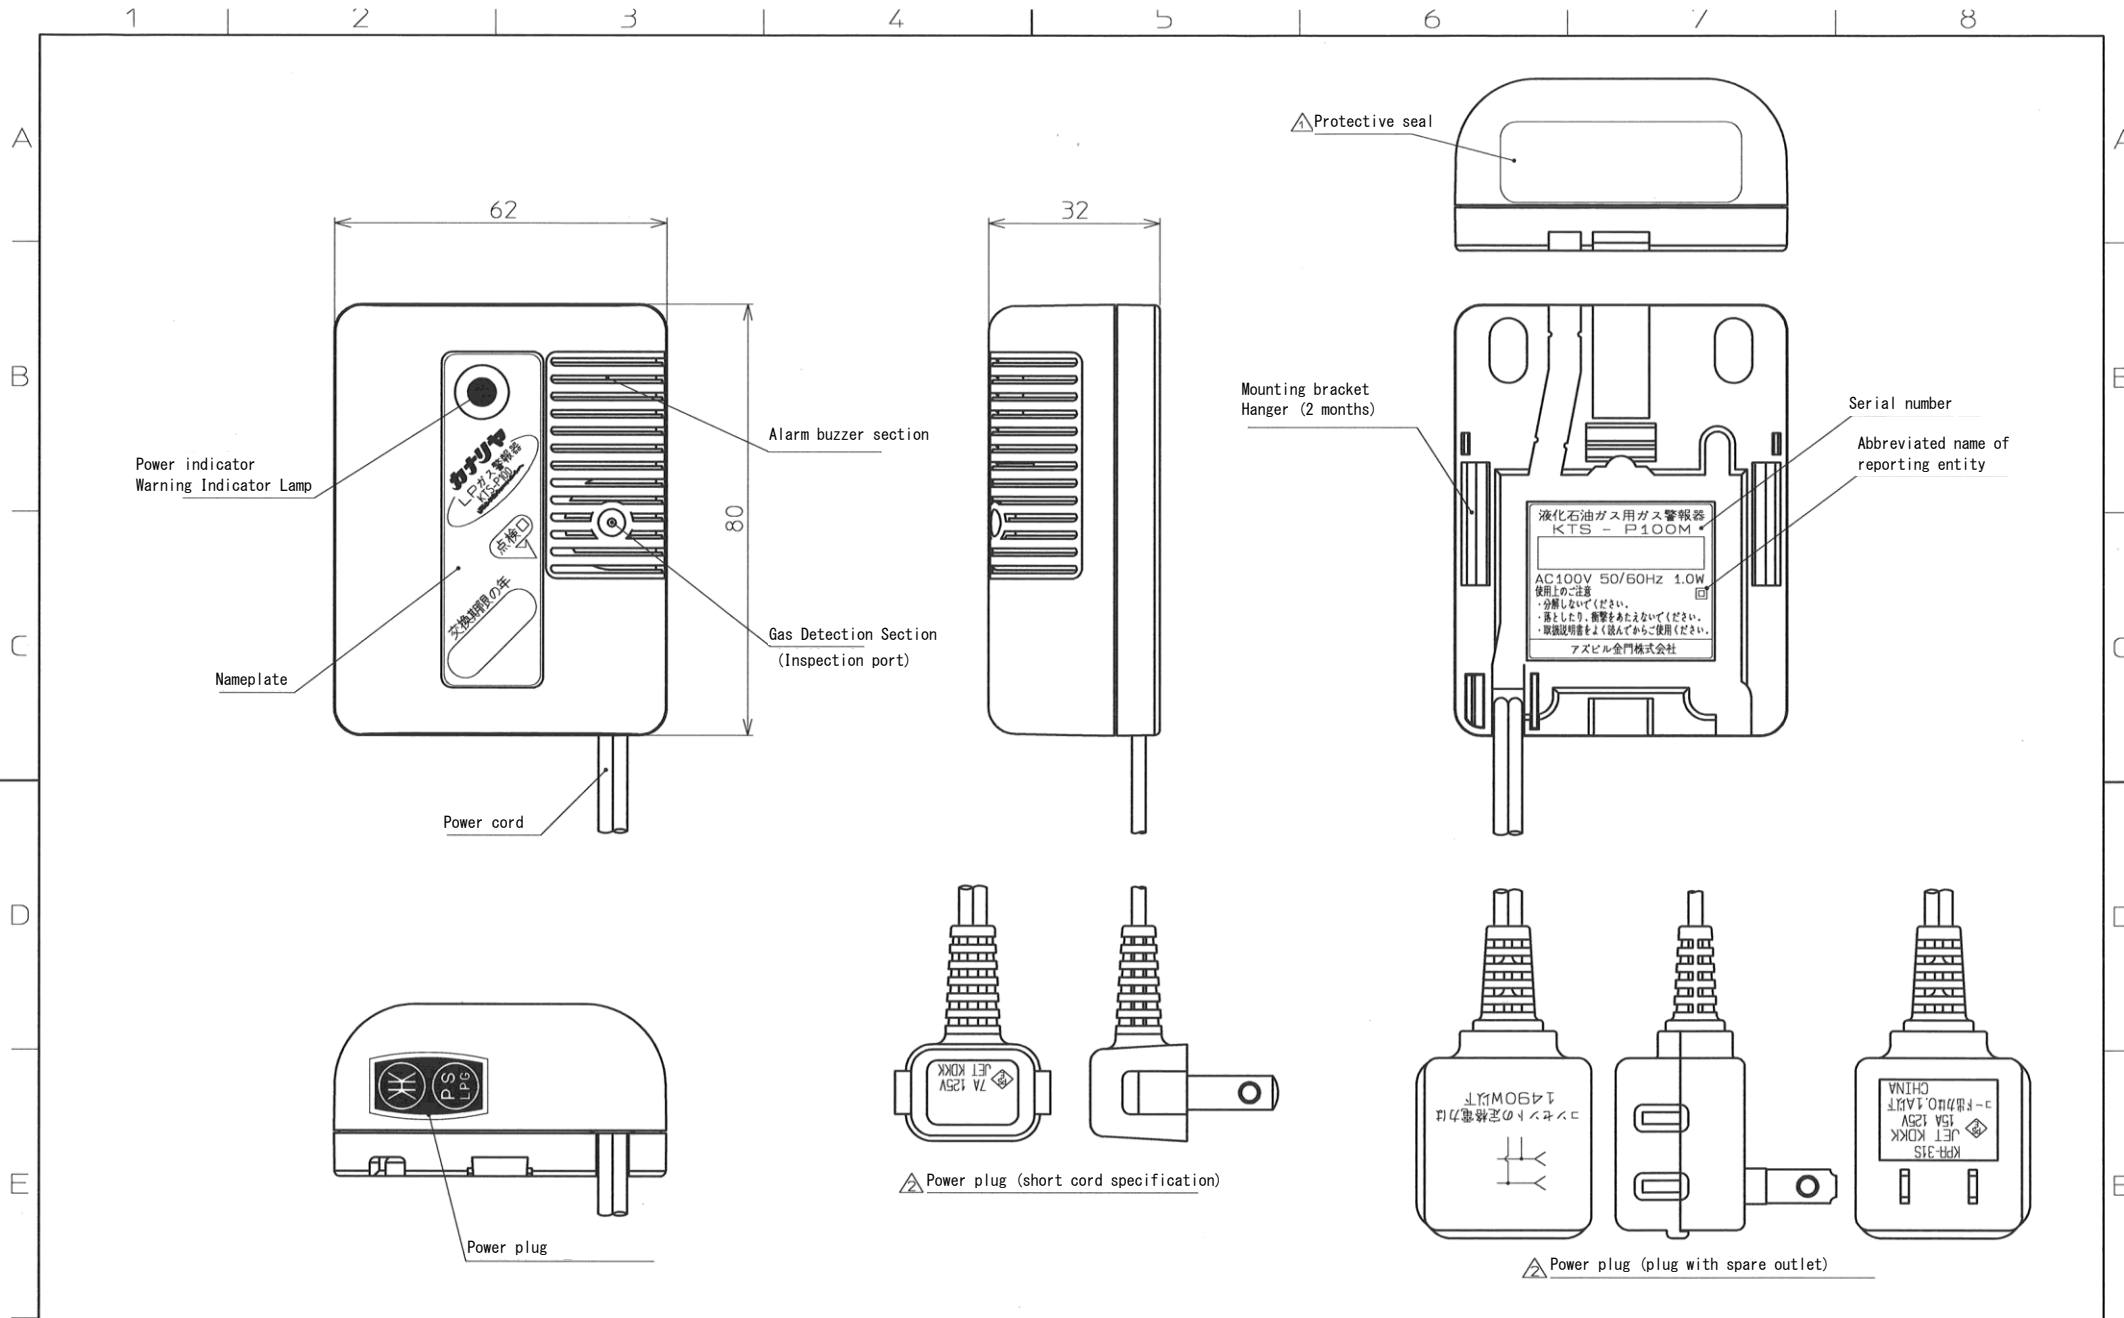

KTS-P100M : Cord length approx. 2.5 m (plug with spare outlet)
 KTS-P100M(S) : Cord length approx. 35 cm (short cord specification)

E				MATERIAL		REMARK	
2		15.3.6	AC cord change				Representative model: KTS-P100
1		14.7.30	"Protection seal" added		PROJECTION		SCALE
MARK	COUNT	DATE	REVISION		1:1		NAME
APPROVED	CHECKED	DRAWN	DATE		Azbil Kimmon		DRAWING No.
Imamoto	Ito	Komatsu	2014.7.30		Co.,Ltd. JAPAN		G-KTSP100M-A000C